

Midhurst Mist



General Product Information

Wood Species:	European Oak
Composition:	Engineered
Surface:	Sanded
Finishing:	UV Oiled

Dimensions & Gradings

Plank

Thickness:	15mm & 20mm
Widths:	180mm, 220mm, 260mm
Lengths:	Random lengths, up to 2500mm sometimes up to 3000mm
Gradings:	Select & Rustic A/B

Herringbone

Thickness:	15mm & 20mm
Dimensions:	100 x 500mm & 90 x 450mm
Gradings:	Select & Rustic A

Chevron


Thickness:	15mm & 20mm
Dimensions:	120 x 600mm
Gradings:	Select & Rustic A

Midhurst Mist




Technical Information


Profile:	Plank: 4 sides tongue & groove Herringbone & Chevron: 4 sides tongue & groove (left & right pcs)
Bevel options:	Plank: 1mm bevel on both long sides, head ends square edged Herringbone & Chevron: 1mm bevel on all four sides
Construction:	15mm: 3.5mm hardwood wear layer glued to 12mm multi layer WBP Birch / Eucalyptus plywood 20mm: 5.5mm hardwood wear layer glued to 15mm multi layer WBP Birch / Eucalyptus plywood
Use:	Indoor
Site conditions:	between 40-65% relative humidity and 15oC - 25oC room temperature
Installation method:	Plank: Glue down or floating Herringbone & Chevron: Glue down
Under Floor Heating:	Suitable for radiant underfloor heating when installed according to G&F instructions for UFH



Product Code: SC109MMP

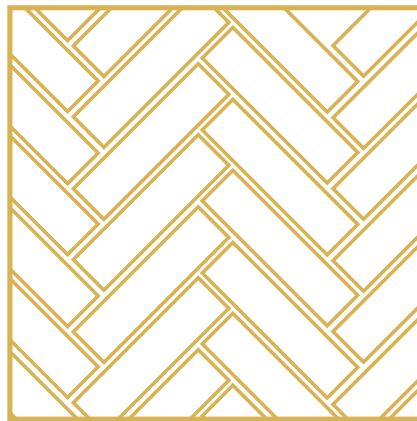

Product Code: SC109MMH

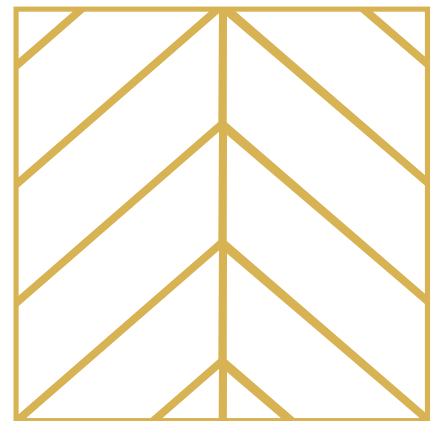

Product Code: SC109MMC

info@graceandfrasier.com
www.graceandfrasier.com

This document has been prepared by Grace & Frasier
Grace & Frasier reserve the right to change the specification of this product at any time without obligation to notify a third party.