

# The Witterings



## General Product Information

|               |                   |
|---------------|-------------------|
| Wood Species: | European Oak      |
| Composition:  | Engineered        |
| Surface:      | Sanded            |
| Finishing:    | Stained, UV Oiled |

## Dimensions & Gradings

### Plank

|            |                                                     |
|------------|-----------------------------------------------------|
| Thickness: | 15mm & 20mm                                         |
| Widths:    | 180mm, 220mm, 260mm                                 |
| Lengths:   | Random lengths, up to 2500mm sometimes up to 3000mm |
| Gradings:  | Select & Rustic A/B                                 |

### Herringbone

|             |                          |
|-------------|--------------------------|
| Thickness:  | 15mm & 20mm              |
| Dimensions: | 100 x 500mm & 90 x 450mm |
| Gradings:   | Select & Rustic A        |

### Chevron

|             |                   |
|-------------|-------------------|
| Thickness:  | 15mm & 20mm       |
| Dimensions: | 120 x 600mm       |
| Gradings:   | Select & Rustic A |

# The Witterings




## Technical Information


|                      |                                                                                                                                                                                      |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Profile:             | Plank: 4 sides tongue & groove Herringbone & Chevron: 4 sides tongue & groove (left & right pcs)                                                                                     |
| Bevel options:       | Plank: 1mm bevel on both long sides, head ends square edged<br>Herringbone & Chevron: 1mm bevel on all four sides                                                                    |
| Construction:        | 15mm: 3.5mm hardwood wear layer glued to 12mm multi layer WBP Birch / Eucalyptus plywood<br>20mm: 5.5mm hardwood wear layer glued to 15mm multi layer WBP Birch / Eucalyptus plywood |
| Use:                 | Indoor                                                                                                                                                                               |
| Site conditions:     | between 40-65% relative humidity and 15oC - 25oC room temperature                                                                                                                    |
| Installation method: | Plank: Glue down or floating Herringbone & Chevron: Glue down                                                                                                                        |
| Under Floor Heating: | Suitable for radiant underfloor heating when installed according to G&F instructions for UFH                                                                                         |



Product Code: SC1012TWP

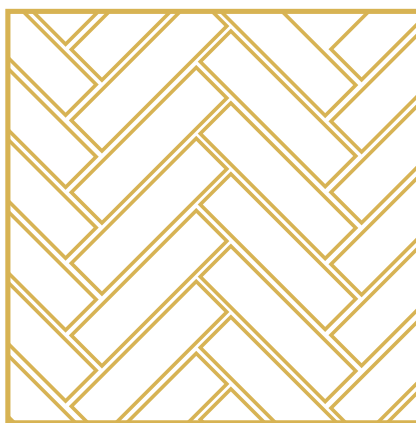

Product Code: SC1012TWH

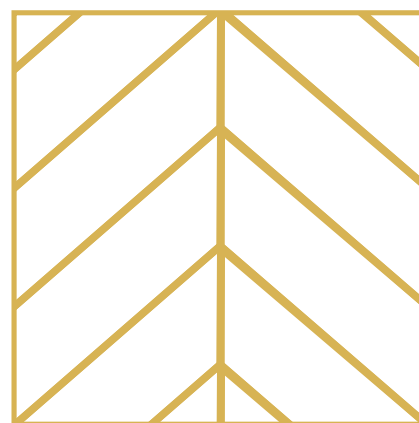

Product Code: SC1012TWC

[info@graceandfrasier.com](mailto:info@graceandfrasier.com)  
[www.graceandfrasier.com](http://www.graceandfrasier.com)

This document has been prepared by Grace & Frasier  
Grace & Frasier reserve the right to change the specification of this product at any time without obligation to notify a third party.